


No Sag Installation

DRYWALL

Construction Adhesive

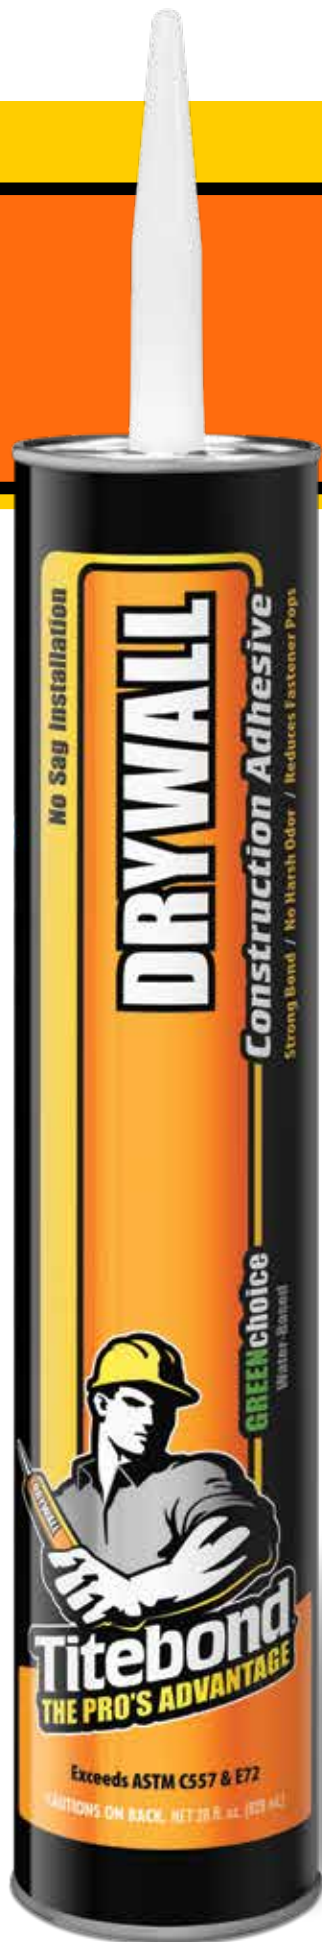

Titebond® GREENchoice™ Drywall Construction Adhesive is specifically designed for installing drywall and paneling to most common building materials including wood and metal studs. It offers excellent adhesion, reduces nail pops and provides a “no sag” installation. This VOC-compliant, nonflammable formula is environmentally safe—emitting no harmful fumes and promoting healthy living and working environments.

GREENchoice Water-Based

Environmentally safe

Excellent strength

No sag installation

Cleans easily with water
in wet state

Cartridge and carton
contain post-consumer
recycled material

Reduces nail pops

VOC-compliant

Recommended For


Installation of drywall and paneling to most common building materials.

Specifications & Certifications

Exceeds ASTM C557. Tested in accordance with ASTM E72 for racking and shearing.

Compatible Materials

Common building materials including wood, metal, gypsum wallboard, plywood, hardboard, tile board, plaster, wallpaper (non-vinyl) and most other porous materials.

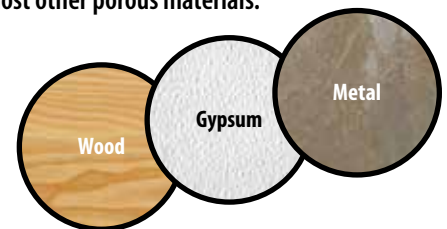

Titebond®
THE PRO'S ADVANTAGE

Ordering/Sku Information

Size	Part Number	UPC	Case UPC	Weight	Units Per Package	Packages Per Pallet
28 Oz. Cartridge	7272	037083072723	10037083072720	34.62 lbs.	12	44

Technical Information

- **Application Temperature:** Over 40°F for adhesive and substrates
- **Service Temperature:** 0°F to 120°F
- **Working Time:** Approximately 20 minutes for a 1/4" bead

Physical Properties

- **Type:** Polymer emulsion
- **State:** Medium-viscosity mastic
- **Color:** Beige
- **Solids:** 71%
- **Viscosity:** 200,000 cps
- **pH:** 7.0
- **VOC:** < 50 g/L
- **Weight/Gallon:** 12.04 lbs.
- **Flashpoint:** > 200°F
- **Freeze/Thaw Stability:** Stable
- **Storage Life:** 24 months in unopened container above 40°F

User Tips

Not intended for exterior applications. For all ceiling applications, fasteners are required in addition to the adhesive. For best results, store above 40°F.

Directions

PREP: Surfaces must be clean and free of any material that may prevent adequate adhesion.

APPLICATION: Cut tip on slant for 1/4" to 3/8" bead. Puncture inner seal and place in cartridge gun. Apply continuous bead of adhesive to studs or furring strips. Where two panels join, apply a zigzag bead so adhesive will contact both panels. **Adhere materials within 20 minutes or before skinning of adhesive occurs.** Press surfaces firmly together for full contact with adhesive.

Note: For drywall, use fasteners in accordance with local building standards. For paneling or other large applications, use finishing nails at top and bottom and brace overnight as needed. When applying adhesive overhead for ceiling applications, use 3/8" bead or less.

CLEANUP: Tools and adhesive may be cleaned with water while the adhesive is wet. If dried, tools and adhesive may be cleaned with water/acetone/vinegar mixture. Follow solvent vendor's precautions.

Coverage

Size	1/8" bead	1/4" bead	3/8" bead
28 Oz. Cartridge	355 ft.	86 ft.	39 ft.

GREENchoice
Water-Based

Visit Titebond.com for the most up-to-date product information.

Franklin International

